

# AU Luminator



4684542 93 yard 15,750 lbs  
10'-2" spread



Full width product guard.



Fully lined interior.  
54" wide belt / 60° slants  
3/8 floor plastic




## Aluminum Belt Trailer Specifications

- Floor Chain is 88 XH Pintle Chain, 2 strands
- Easy access belt adjustment at front of trailer
- 2 ply belt flaps full width of floor
- Ultra high strength steel, Bolt on 5<sup>th</sup> wheel
- Hydraulic Gear drive 130000 in-lb, 18000 pound radial load
- 2 15/16 rear drive shaft, with weld on sprockets and weld on splined hub
- All hydraulic top hinge main gate, with center knife gate and cylinder locks
- Floor liner is UHMW plastic 3/8 thick, sides fully lined with 3/16 HMW plastic
- Extended rear discharge with wings on rear of trailer
- Hydraulic pressure line filter, manual / electric control valve.
- Hydraulic floor speed control
- Main frame rails and suspension sub-frame are steel for years of strong flexibility.
- Side walls and 60° slope sheets are post and hat aluminum construction, riveted
- 50000 pound landing gear, trailer can be un-hooked even if loaded.
- ABS brake system , High Count LED lighting, Grote return ground sealed wiring harness, Reflective tape
- 11 x 22.5 on 10 bolt hub pilot aluminum rims, centrifuse drums
- Hendrickson Intraax Air ride suspensions, lifts, spreads, triples are all possible
- Shur-loc Roll Tarp



Unloading wet distillers grain.

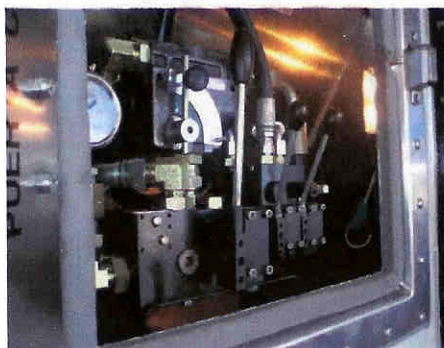

Electric Hydraulic Valve with manual levers

# AU *luminator*



4684542 93 yard 15,140lbs



Tow Rings Available



4266542 59 yard 14,040lbs



Optional Bolt-on Fenders



4872543 82 yard 17,500lbs



4266542 59 yard 13,650lbs

Manufactured by Valley Farm Ind. LLC  
of Benkelman, Nebraska

Aulick Industries - 877-285-4258  
[www.aulick.com](http://www.aulick.com)